Polymer

Wayon Electronics Co., Ltd.

WAYON

LP-SM185C

PTC Devices No.1001, Shiwan 7th Tel: 86-21-50968308

No.1001, Shiwan 7th Road, Pudong, Shanghai 201202, P.R.China

Fax: 86-21-50968310


Surface Mount Thermistor E-mail: market@way-on.com

Http:<u>//www.way-on.com</u>

Features

- Fast tripping resettable circuit protection
- Lead-free and compliant with the European Union RoHS Directive (EU)2015/863
- Surface mount packaging for automated assembly
- Agency Recognition: TUV





Product Dimension (mm)

Part Number	Α	В	С	D	Е	Part	SM
	Max	Max	Max	Min	Min	— Marking	185
LP-SM185C	7.98	5.44	1.25	0.80	0.30	SM185	100

Electrical Characteristics

Part Number	Ін	Iτ	V _{max}	I _{max}	Ttrip		Pd typ	R _{min}	R _{1max}
	(A)	(A)	(V)	(A)	Current(A)	Time(S)	(W)	(Ω)	(Ω)
LP-SM185C	1.85	3.70	15	40	8.0	5.00	2.1	0.045	0.165

 $I_{\text{H}}\text{=}\text{Hold}$ current: maximum current at which the device will not trip at 25°C still air.

 I_T =Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max}=Maximum voltage device can withstand without damage at rated current.

 $I_{\text{max}}\text{=}\text{Maximum}$ fault current device can withstand without damage at rated voltage.


T_{trip}=Maximum time to trip(s) at assigned current.

Pd_{typ}=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min}=Minimum device resistance at 25°C prior to tripping.

R_{1max}=Maximum device resistance measured in the nontripped state 1 hour post reflow.

Solder Reflow Recommendation

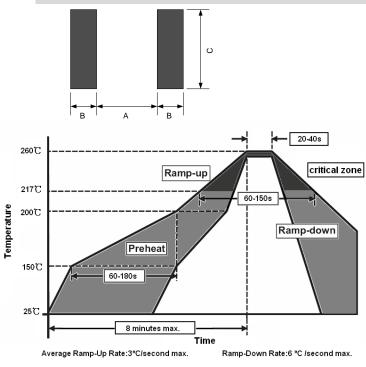

Solder Pad Layout					
Dant Number	Α	В	С		
Part Number	(mm)	(mm)	(mm)		
LP-SM185C	4.60	2.00	5.30		

* Recommended reflow methods: IR, vapor phase oven, hot air oven solder.

Notes:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Tape & Reel: 4000pcs per reel.

DOCUMEN REV LETT	NT: M20199		WAYON			
PAGE NO:		Polymer	Wayon Electronics Co., Ltd.			
REV DATE: 2022-11-18		PTC Devices	No.1001, Shiwan 7th Road, Pudong, Shanghai 201202, P.R.China			
PART NUMBER:			Tel: 86-21-50968308 Fax: 86-21-50968310			
LP-S	M185C	Surface Mount Thermistor	E-mail: <u>market@way-on.com</u> Http://www.way-on.com			
		SN	ND PTC 使用注意事项			
		Caut	ions for SMD PTC Use			
1.			目,超出 PTC 最大电压或最大电流规格值的操作,可能会导致 PTC 出现电弧,			
	阻值升高,甚至					
	Operation bey even burning.	ond the maximum voltage or o	current may result in device damage, PTC arcing, resistance increasing,			
2.		的各温度下的 Hold current 均是	是PTC 经过一次回流焊接得出的常规性能,PTC 能够在不同温度对应的电流			
			C能够适用的长期充电或放电电流的条件。			
			eratures in the datasheet is the conventional performance of after one reflow corresponding to different temperatures. But this current is not the condition			
	that PTC can of	charging or discharging curren	t for long time.			
3.			在维安指定测试板经过一次回流焊之后的测试。如果客户有二次回流焊或者			
			定程度的衰减。所以需要验证其适用性。 ics specified in the datasheet are based on the test tested on the specified			
	testing board v	which is after one reflow weldir	ng. The applicability needs to be verified because above parameters may be			
4.			like twice soldering or injection. 议在 PTC 周围不要设计热源元件,尽量减少外部热源的影响。			
4.			nended that no heat source devices be designed to around in order to			
_		side heat source impact.				
5.			式,焊接工艺为回流焊。焊接工艺可参考维安推荐的回流焊曲线。如果回流焊禁止使用手工焊接 PTC,禁止对线路板其他元件或端子返工时使用热风枪。			
			and its reflow soldering. Please refer to the Wayon recommended soldering			
	curve. If the so	oldering temperature exceeds	the recommended value, the PTC might be damaged. Manual PTC			
0			ed to use in the rework of other components on the board.			
6.			料、单组份、双组份固化胶粘剂、硅胶,需要对注塑料胶料等材料牌号以及 角保产品及工艺的匹配性,确认不会影响 PTC 性能之后方可使用。			
	When assembling and applying PTC, the material mark and application parameters (Temperature, Time,					
			illica gels and etc. should be verified to ensure the consistency between the			
7.			ly it is confirmed that would not influent PTC then can be used. 或其他清洗剂进行清洗。如必须使用,需要验证各类清洗剂、洗板水以及溶剂			
	的适用性,确认	人不会影响 PTC 性能之后方可	使用。已知对 PTC 有影响的化学药品包括但不仅限于醚类、苯类、酮类以及			
		解性、破坏性的有机化合物。清	青洗后将产品放置于敞开的环境中至少 24 小时,将残留的溶剂进行充分的挥			
	发。 When assemb	ling and applying PTC, it is no	t recommended that using washer water or other cleaner to clean PTC. If it			
	is required, it is necessary to verify the applicability of various cleaner, washer water and solvents, it is also confirme					
			e. Chemicals that are known to have an effect on PTC include, but are not ganic compounds such as ethers, benzenes, ketones, and lipids. Placing			
	the product in	open environment for at least	24 hours to volatilize the residual solvents.			
8.			H、刺等方式作用 PTC 本体,以免引起 PTC 性能衰减。			
	degradation.	smash, clamp, pull, dent, twis	t and etc. to PTC during assembling process to avoid the performance			
9.	在产品应用中,		主塑或打胶,须在尽量短的时间内完成,如贴装与注塑打胶时间间隔超过1			
		闭保存,可避免 PTC 长时间暴	露于空气环境中。 the board, please finish the injection or glue as soon as possible. IF the time			
			n 1 month, PTC needs to reserve in the closed space so as to avoid PTC			
	expose to the	air too long.				
10.			使用,重复多次的保护会降低 PTC 的维持电流。 be used as switch. The hold current will reduced after repeated tripping.			
11.			科做内膜,禁止使用 TPE 类与 PVC 类等材料做内膜。			
		in the charging terminal, the F	PP material is recommended as inner membrane, TPE or PVC materials are			
12	prohibited. 维安 SMD PT(∑ 湿敏等级为 1 级,为密封包约	专。客户如在库存中发现有包装破损的,立即将产品隔离处理;使用时如有余			
		前包装状态,做密封保存。				
			aled packed. If any damaged package is found by customer, please isolate			
13.			s the previous package and reserve hermetically. 9法律法规回收报废,具体原材料组成可参见 MSDS。			
	When the proc	duct is finally discarded, it can	be treated recycled in accordance with local laws and regulations, and raw			
	material comp	ositions of PPTC can be refer	red to MSDS.			