

1.1MHz, Precision, Rail-to-Rail I/O CMOS Operational Amplifier

FEATURES

- HIGH GAIN BANDWIDTH: 1.1MHz
- RAIL-TO-RAIL INPUT AND OUTPUT
 $\pm 4.5\text{mV}$ Max V_{os}
- INPUT VOLTAGE RANGE: -0.1V to +5.6V
with V_s = 5.5V
- SUPPLY RANGE: +2.5V to +5.5V
- SPECIFIED UP TO +125°C
- *Micro SIZE PACKAGES:* SOIC-8

APPLICATIONS

- SENSORS
- PHOTODIODE AMPLIFICATION
- ACTIVE FILTERS
- TEST EQUIPMENT
- DRIVING A/D CONVERTERS

DESCRIPTION

The RS358A products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (1.1MHz) and slew rate of 0.5V/us. The op-amps are unity gain stable and feature an ultra-low input bias current.

The RS358A has lower offset, which is guaranteed not upper than $\pm 4.5\text{mV}$ at 25°C with V_s = 5V, V_{cm} = V_s/2.

The devices are ideal for sensor interfaces, active filters and portable applications. The RS358A families of operational amplifiers are specified at the full temperature range of -40°C to +125°C under single or dual power supplies of 2.5V to 5.5V.

Device Information ⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE(NOM)
RS358A	SOIC-8(SOP8)	4.90mm × 3.90mm
	MSOP-8	3.00mm × 3.00mm
	TSSOP-8	3.00mm × 4.40mm


(1) For all available packages, see the orderable addendum at the end of the data sheet.

Revision History

Note: Page numbers for previous revisions may different from page numbers in the current version.

VERSION	Change Date	Change Item
A.1	2020/03/23	Initial version completed
A.2	2021/06/10	Add "Figure 3. Functional Block Diagram" in Page10

Pin Configuration and Functions (Top View)

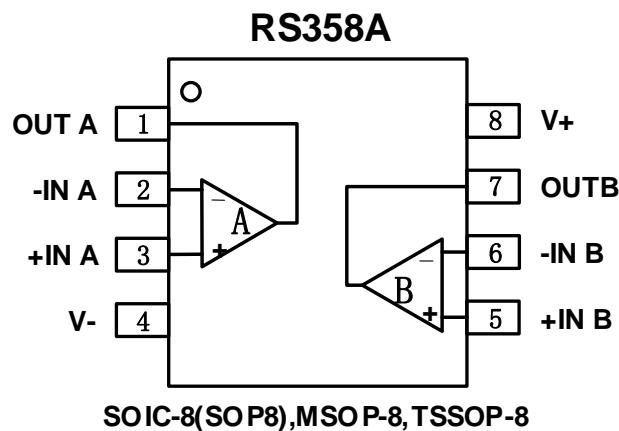

Pin Description

NAME	PIN	I/O	DESCRIPTION
	SOIC-8(SOP8)/MSOP-8/TSSOP-8		
-INA	2	I	Inverting input, channel A
+INA	3	I	Noninverting input, channel A
-INB	6	I	Inverting input, channel B
+INB	5	I	Noninverting input, channel B
OUTA	1	O	Output, channel A
OUTB	7	O	Output, channel B
V-	4	-	Negative (lowest) power supply
V+	8	-	Positive (highest) power supply

SPECIFICATIONS

Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
Voltage	Supply, Vs=(V+) - (V-)		7	V
	Signal input pin ⁽²⁾	(V-)-0.5	(V+) +0.5	
	Signal output pin ⁽³⁾	(V-)-0.5	(V+) +0.5	
Current	Signal input pin ⁽²⁾	-10	10	mA
	Signal output pin ⁽³⁾	-140	140	mA
	Output short-circuit ⁽⁴⁾	Continuous		
Temperature	Operating range, T _A	-40	125	°C
	Junction, T _J		150	
	Storage, T _{stg}	-65	150	

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.

(3) Output terminals are diode-clamped to the power-supply rails. Output signals that can swing more than 0.5V beyond the supply rails should be current-limited to ±140mA or less.

(4) Short-circuit to ground, one amplifier per package.

ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM)	±3000	V
		Machine Model (MM)	±200	

Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
Supply voltage, Vs= (V+) - (V-)	Single-supply	2.5		5.5	V
	Dual-supply	±1.25		±2.75	

Thermal Information:RS358A

THERMAL METRIC ⁽¹⁾		RS358A			UNIT	
		8PINS				
		SOIC-8	MSOP-8	TSSOP-8		
R _{θJA}	Junction-to-ambient thermal resistance	116	165	192	°C/W	
R _{θJC(top)}	Junction-to-case(top) thermal resistance	60	53	64.3	°C/W	
R _{θJB}	Junction-to-board thermal resistance	56	87	105.3	°C/W	
Ψ _{JT}	Junction-to-top characterization parameter	12.8	4.9	7.6	°C/W	
Ψ _{JB}	Junction-to-board characterization parameter	98.3	85	105.5	°C/W	
R _{θJC(bot)}	Junction-to-case(bottom) thermal resistance	N/A	N/A	22.7	°C/W	

PACKAGE/ORDERING INFORMATION

Orderable Device	Package Type	Pin	Channel	Op Temp(°C)	Device Marking ⁽¹⁾	Package Qty
RS358AXK	SOIC-8(SOP8)	8	2	-40°C~125°C	RS358A	Tape and Reel,4000
RS358AXM	MSOP-8	8	2	-40°C~125°C	RS358A	Tape and Reel,4000
RS358AXQ	TSSOP-8	8	2	-40°C~125°C	RS358A	Tape and Reel,4000

NOTE:

- (1) There may be additional marking, which relates to the lot trace code information(data code and vendor code), the logo or the environmental category on the device.







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_s = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_s/2$, and $V_{\text{OUT}} = V_s/2$, unless otherwise noted.)

PARAMETER	CONDITIONS	T_J	RS358A				
			MIN	TYP	MAX	UNITS	
POWER SUPPLY							
V_s	Operating Voltage Range		25°C	2.5		5.5	V
I_Q	Quiescent Current/Amplifier		25°C		60	110	μA
PSRR	Power-Supply Rejection Ratio	$V_s = 2.5\text{V to } 5.5\text{V}$, $V_{\text{CM}} = (V_s) + 0.5\text{V}$	25°C	74	90		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	65			
INPUT							
V_{OS}	Input Offset Voltage	$V_{\text{CM}} = 0\text{V to } 3.5\text{V}$	25°C	-4.5	± 0.8	4.5	mV
$V_{\text{OS TC}}$	Input Offset Voltage Average Drift	$-40^\circ\text{C to } 125^\circ\text{C}$			2		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current		25°C		10	100	pA
I_{OS}	Input Offset Current		25°C		1	10	pA
V_{CM}	Common-Mode Voltage Range	$V_s = 5.5\text{V}$	25°C	-0.1		5.6	V
CMRR	Common-Mode Rejection Ratio	$V_s = 5.5\text{V}, V_{\text{CM}} = -0.1\text{V to } 4\text{V}$	25°C	74	90		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	68			
		$V_s = 5.5\text{V}, V_{\text{CM}} = -0.1\text{V to } 5.6\text{V}$	25°C	63	80		
			$-40^\circ\text{C to } 125^\circ\text{C}$	57			
OUTPUT							
AO _L	Open-Loop Voltage Gain	$RL = 2\text{K}\Omega, V_o = 0.15\text{V to } 4.85\text{V}$	25°C	85	105		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	80			
	Output Swing From Rail	$RL = 10\text{K}\Omega, V_o = 0.05\text{V to } 4.95\text{V}$	25°C	88	110		mV
			$-40^\circ\text{C to } 125^\circ\text{C}$	83			
I _{out}	Output Current Source	$RL = 2\text{K}\Omega$	25°C		25		mA
					8		
I _{out}	Output Current Source		25°C		130		mA
FREQUENCY RESPONSE							
SR	Slew Rate		25°C		0.5		V/us
GBP	Gain-Bandwidth Product		25°C		1.1		MHz
PM	Phase Margin		25°C		64		°
ts	Setting Time, 0.1%				1.3		us
	Overload Recovery Time	$V_{\text{IN}} \cdot \text{Gain} \geq V_s$			2.3		us
NOISE							
e _n	Input Voltage Noise Density	f = 1KHz	25°C		22		$\text{nV}/\sqrt{\text{Hz}}$
		f = 10KHz	25°C		20		$\text{nV}/\sqrt{\text{Hz}}$







TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_s=5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_s/2$, $V_{\text{OUT}} = V_s/2$, unless otherwise noted.

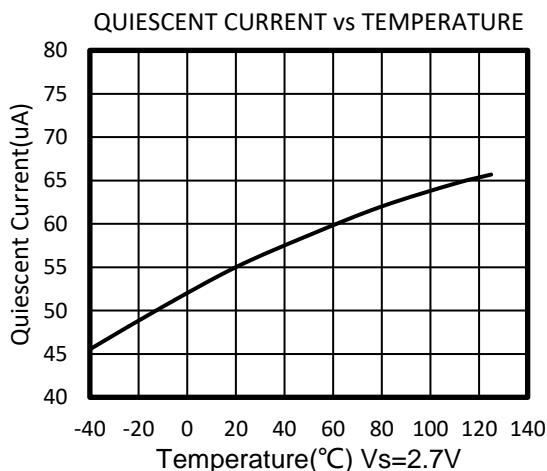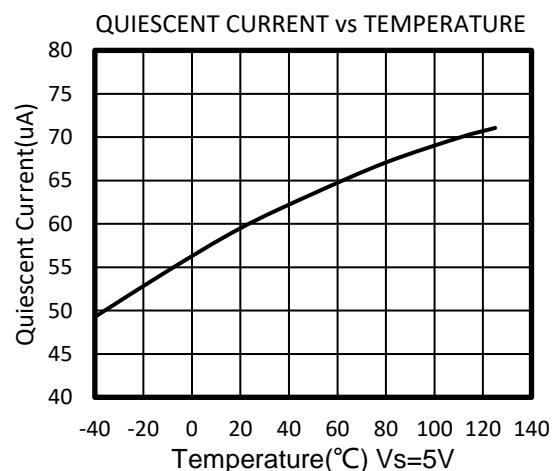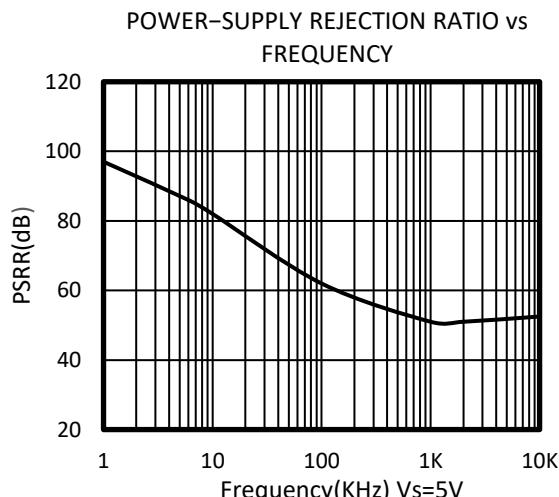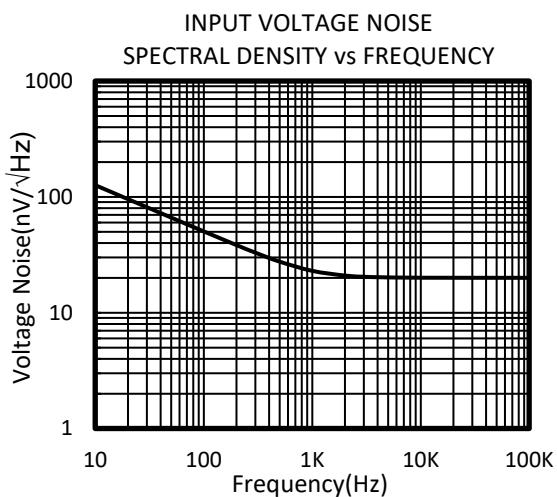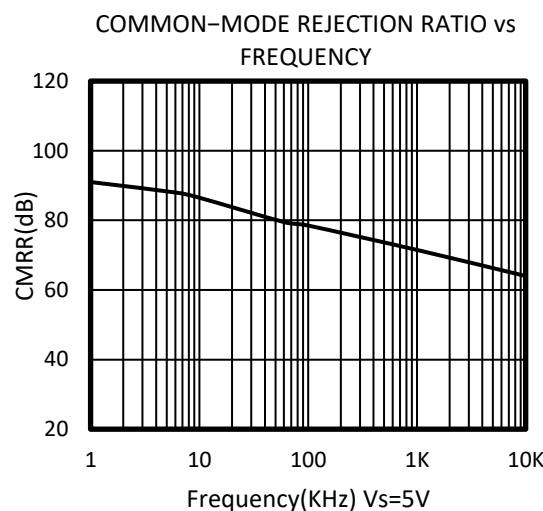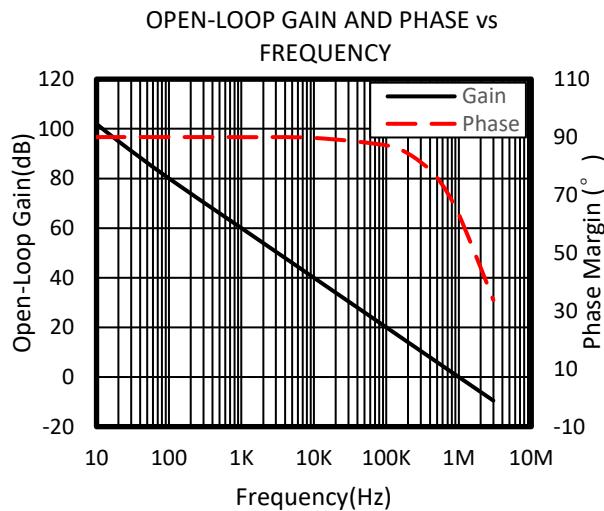


TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

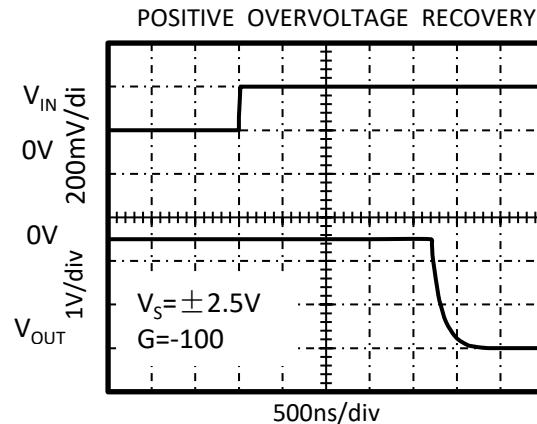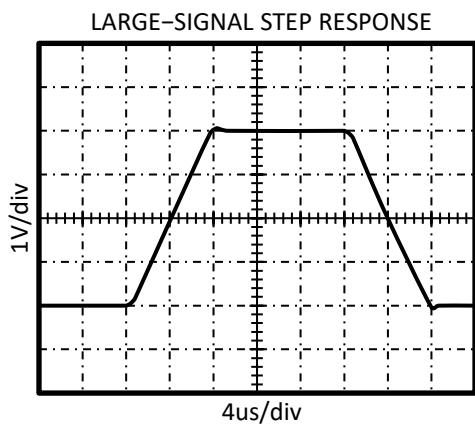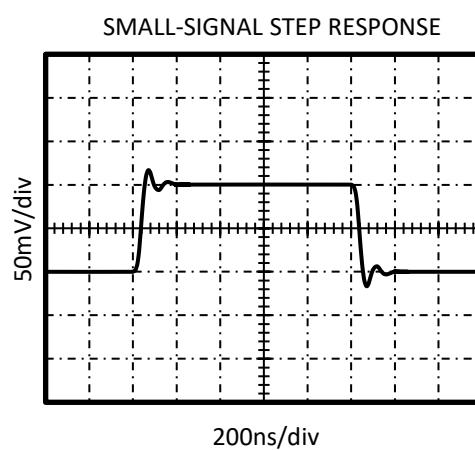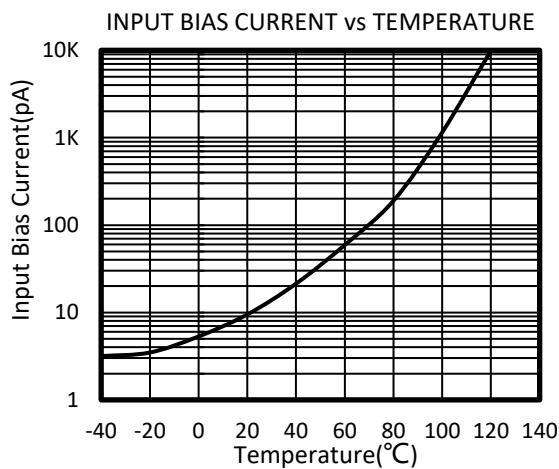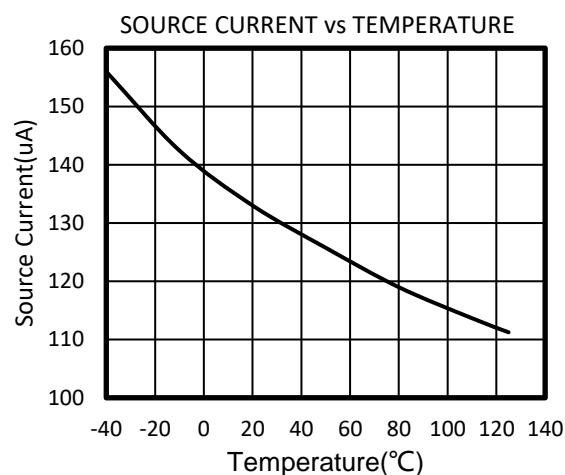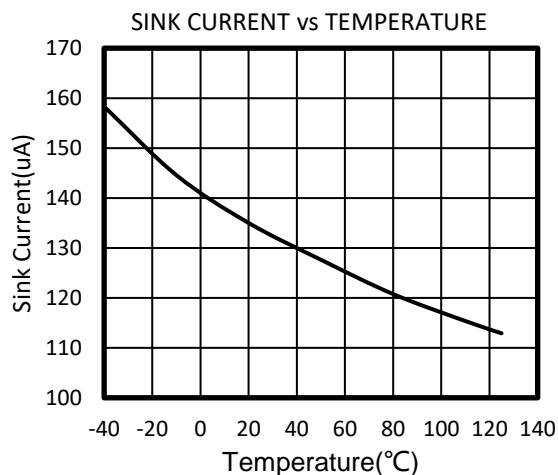

TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_s=5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_s/2$, $V_{\text{OUT}} = V_s/2$, unless otherwise noted.

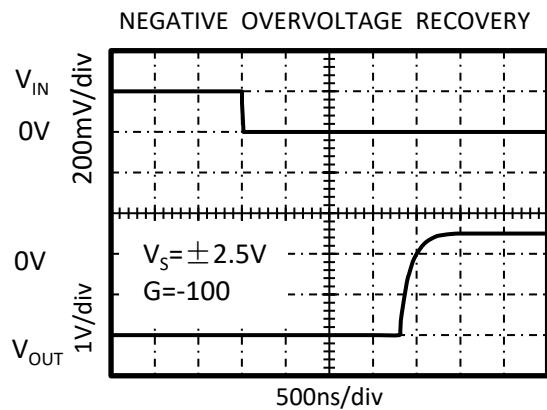

APPLICATION NOTES

The RS358A is high precision, rail-to-rail operational amplifiers that can be run from a single-supply voltage 2.5V to 5.5V ($\pm 1.25V$ to $\pm 2.75V$). Supply voltages higher than 7V (absolute maximum) can permanently damage the amplifier.

Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Good layout practice mandates use of a 0.1 μ F capacitor place closely across the supply pins.

LAYOUT GUIDELINS

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1 μ F capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

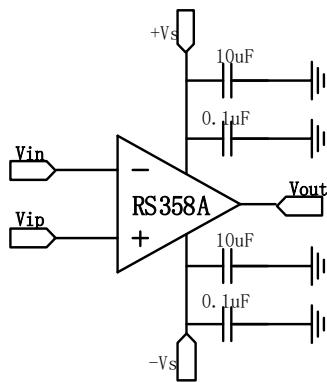


Figure1. Amplifier with Bypass Capacitors

INSTRUMENTATION AMPLIFIER

In the three-op amp, instrumentation amplifier configuration shown in Figure2.

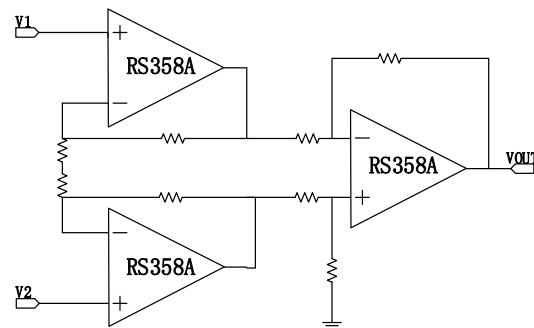


Figure2. Amplifier instrumentation amplifier

Overview



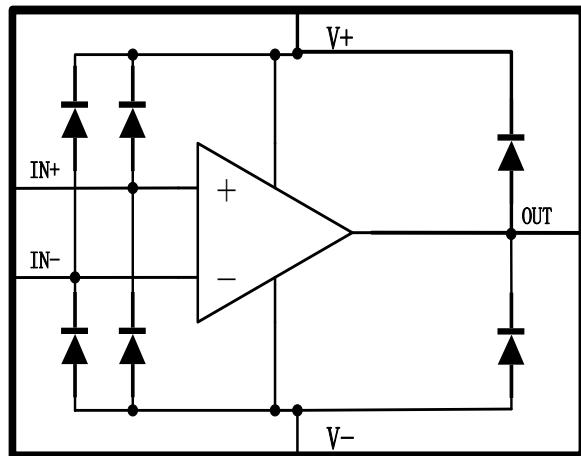


Figure 3. Functional Block Diagram

PACKAGE OUTLINE DIMENSIONS SOIC-8


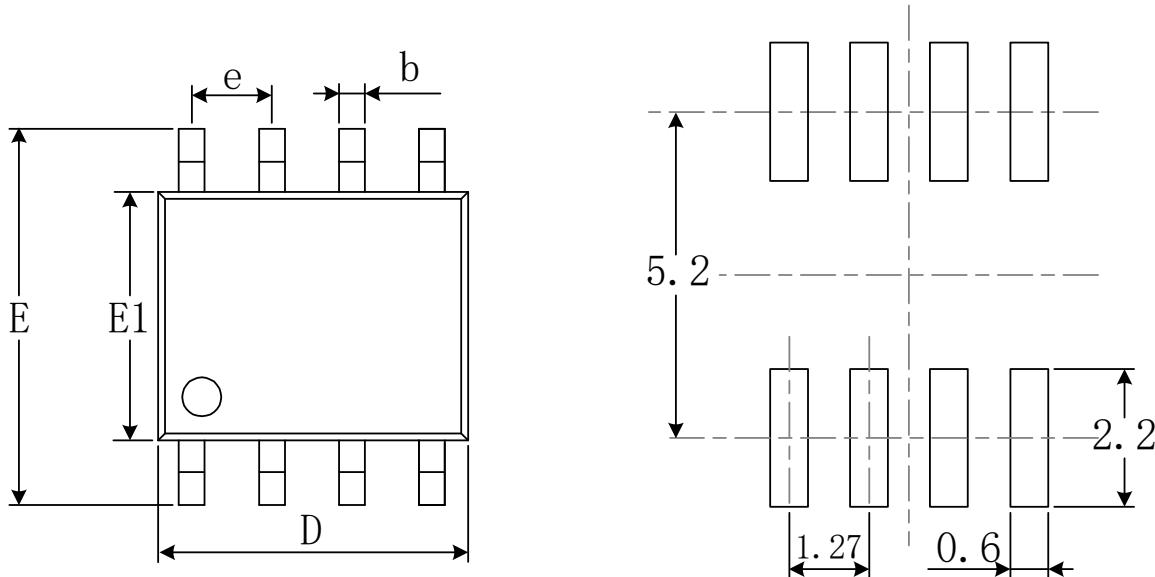


RECOMMENDED LAND PATTERN (Unit: mm)


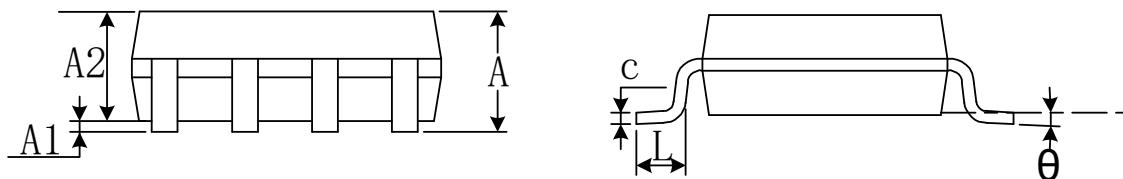


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270(BSC)		0.050(BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

MSOP-8

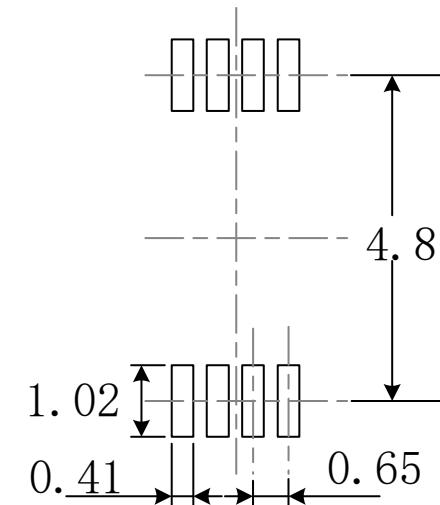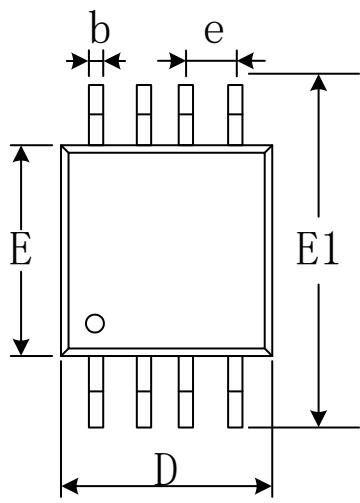


RECOMMENDED LAND PATTERN (Unit: mm)

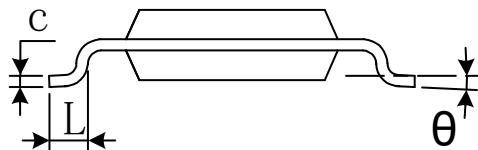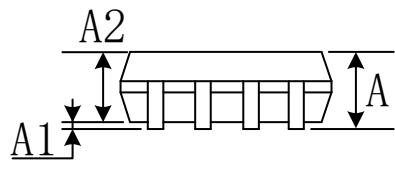


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
e	0.650(BSC)		0.026(BSC)	
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

TSSOP-8

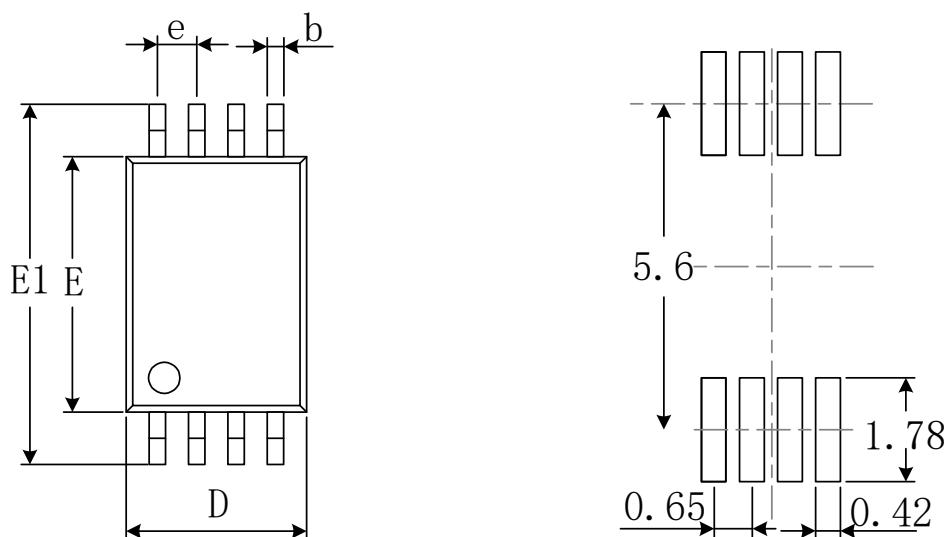

RECOMMENDED LAND PATTERN (Unit: mm)

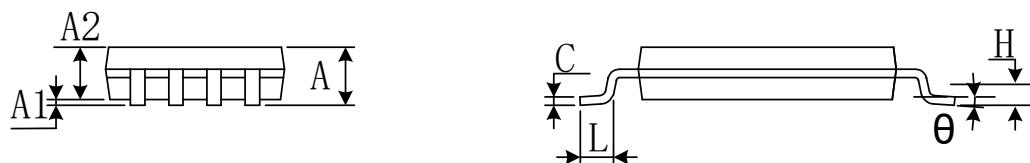

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	2.900	3.100	0.114	0.122
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650(BSC)		0.026(BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
θ	1°	7°	1°	7°